

# TOUGHER THAN EVER



# 1600 CABLE HANDLER

## REMOTE CONTROL ACTION

1600 Cable Handlers provide high payload capacity and powerful torque for fast and efficient overhead tensioning and underground applications, plus durability for extended lifecycle.


- + CAPACITY
- + POWERFUL
- + DURABILITY

## KEY SPECIFICATIONS\*

REEL DIAMETER	48 to 108 in.
REEL WIDTH	38 to 68 in.
REEL DRIVE ROTATION SPEED	0 to 18 RPM
PAYLOAD (SUBJECT TO LOCAL REGULATIONS)	20,000 lb.**
PULLING WINCH CAPACITY	up to 35,000 lb.

\*Nominal measurements | \*\* May vary depending of specific applications and applicable regulations



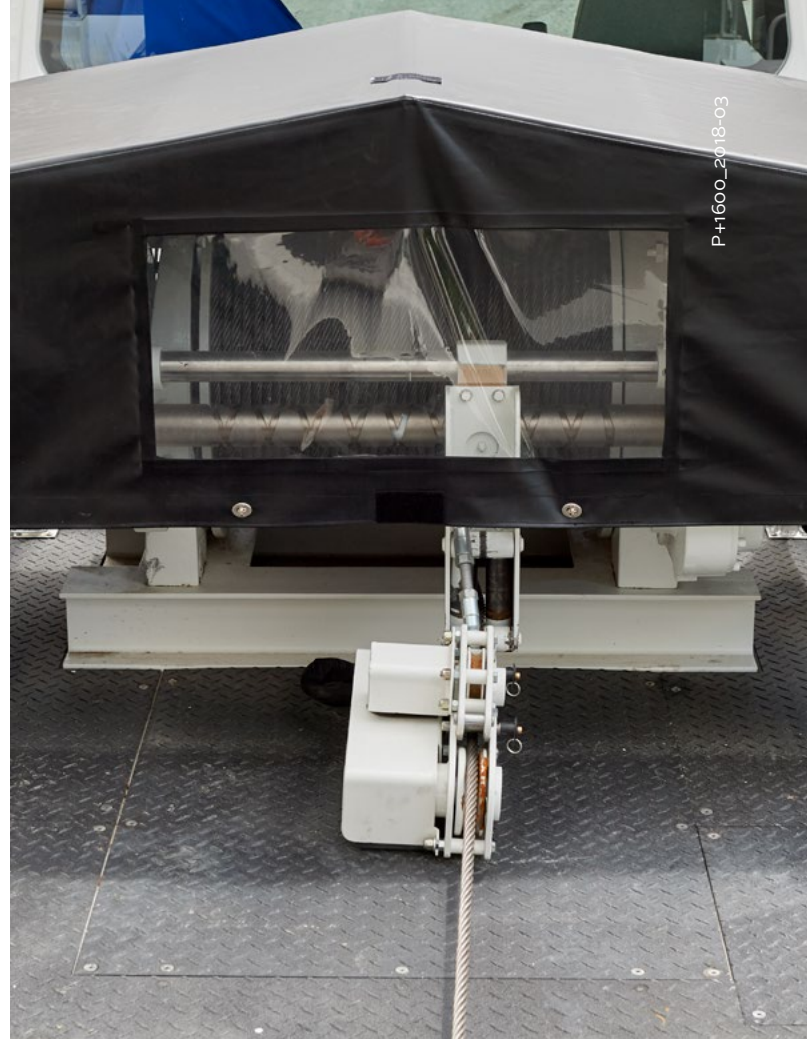

P-1600\_2018-03

## RADIAL PISTON REEL DRIVE MOTORS

- + OUTPUT TORQUE OF 285,000 INCH POUND
- + REEL MOUNTED, DIRECT DRIVE MOTORS
- + INTERNAL MULTI-DISC LOAD HOLDING BRAKES
- + FREEWHEELING CAPABILITY
- + VARIABLE SPEED

*The information and specifications contained in this document are for indication purposes only; as such they may vary over the time.*

## RADIO CONTROL SYSTEM

- + HAND HELD REMOTE CONTROL (TRANSMITTER)
- + MASTER CONTROL PANEL (RECEIVER)
- + PRECISE CONTROL OF OPERATIONAL FUNCTIONS
- + ALL FUNCTIONS OPERATED FROM THE PENDANT
- + SELF-DIAGNOSTIC SYSTEM, SIMPLE EASY MAINTENANCE
- + PULLING AND FOOTAGE COUNTER
- + OPTIONAL RECORDING AND REPORT OF PRESSURE AND FOOTAGE VALUES
- + 25,000 LB CONSTANT PULL WINCH AVAILABLE
- + ELECTRICAL HARNESS TO OPERATE



10 Artisan Street, Victoriaville QC G6P 7E4, CANADA  
1 800-758-5717 | sales@posiplus.com

[POSIPLUS.COM](http://posiplus.com)